

98-inch class TH-98SQ1W 65-inch class TH-65SQ1W
 86-inch class TH-86SQ1W 55-inch class TH-55SQ1W
 75-inch class TH-75SQ1W 49-inch class TH-49SQ1W

**Availability varies depending on model*



Stylish Designs Combine Powerful Function and Performance for Various Commercial Applications

■ Main Features



Actual resolution: 3840 x 2160p

01 | **Brilliant** **4K picture quality**


Stunning Panasonic 4K quality, further supporting HDR and BT.2020 emulation. With a wide viewing angle and Anti-glare panels, an excellent choice for meeting rooms and signage applications where images are viewed up close.

02 | **Superb Reliability**

Features a professional grade IPS panel, for efficiency and high reliability for continuous 24/7 Operation.

03 | **Wide Expandability**

Equipped with the new Intel® SDM specification slot standard, SQ1 Series can be combined with the interface board for simple but wide system interoperability.

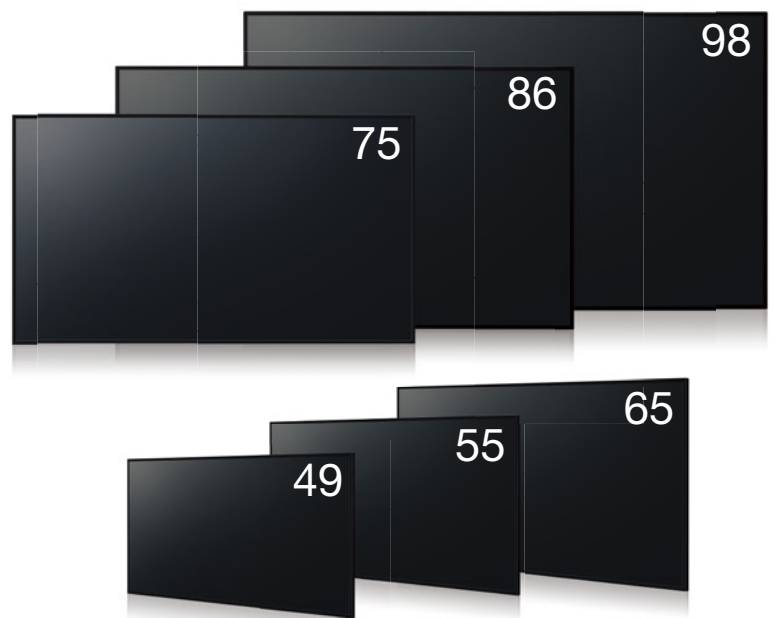

	TH-98SQ1W	TH-86SQ1W	TH-75SQ1W	TH-65SQ1W	TH-55SQ1W	TH-49SQ1W
Screen Size	98-inch class (97.5")	86-inch class (85.6")	75-inch class (74.5")	65-inch class (64.5")	55-inch class (54.6")	49-inch class (48.5")
Brightness	500 cd/m ²					
Contrast	1300:1	1200:1		1100:1		
Resolution	4K (3840 x 2160)					


Supports Intel® SDM Specification Slot Standard

The SQ1 Series is equipped with the new Intel® SDM specification slot standard that supports 4K signals. Combined with the interface board, you can easily use a built-in PC and add various interfaces.



Easy Display of Images Optimized for the Display Content


The SQ1 Series comes with an extensive display menu to let you select the most suitable mode for the content to be displayed and the viewing environment. You can select the best mode for the video source and the place of display. The SQ1 Series also features 12-axis color management (RGB/CMY and intermediate colors) for simpler, more precise adjustment of content color.

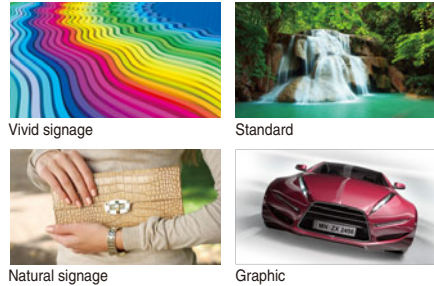

A Thin Design that Focused on Safety

The depth of the TH-98SQ1 is only 90 mm (3.5"). The depth of the TH-98SQ1 is slim when installed using the separately sold, exclusive wall-mounting bracket (TY-WK98PV1), which complies with ADA Compliant*1. The display can be installed to blend into spaces such as crowded passageways or conference rooms without having to worry about an irregular shape getting in the way.

Depth at wall installation

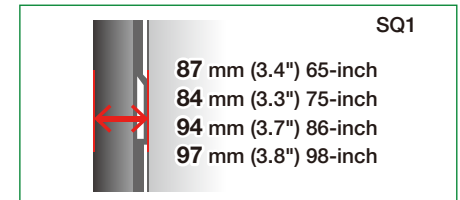

*1: ADA stands for the "Americans with Disabilities Act," a United States law made to protect people with disabilities from discrimination

Specifications

Model	TH-98SQ1W	TH-86SQ1W	TH-75SQ1W	TH-65SQ1W	TH-55SQ1W	TH-49SQ1W	
Display Panel	Panel size	97.5-inch (2476.9mm)	85.6-inch (2174.2 mm)	74.5-inch (1892.7 mm)	64.5-inch (1638.9 mm)	54.6-inch (1387.8 mm)	48.5-inch (1232.0 mm)
	Panel type / Backlight	IPS/Direct LED	IPS/Edge LED				
	Aspect ratio	16:9					
	Effective display area (W x H)	84.9" x 47.8" (2158 x 1214 mm)	74.6" x 41.9" (1895 x 1065 mm)	64.94" x 36.53" (1649.6 x 927.9 mm)	56.2" x 31.6" (1428 x 803 mm)	47.6" x 26.7" (1209 x 680 mm)	42.2" x 23.7" (1073 x 604 mm)
	Resolution	3840 x 2160					
	Brightness (typ.)	500 cd/m ²					
	Contrast ratio (typ.)	1300:1	1200:1		1100:1		
	Response time (typ.)	8.0 ms (G to G)					
	Viewing angle [(T/B)/(L/R)]	178° / 178° (CR≥10)					
	Panel Surface Treatment	Anti-Glare (Haze 28 %)					
Terminals	HDMI In	TYPE A Connector x 2 (HDCP2.2 supported)					
	DisplayPort In	DisplayPort x 1 (HDCP2.2 supported)					
	DisplayPort Out	DisplayPort x 1 (HDCP1.4 supported)					
	DVI-D/Audio In (L/R)	DVI-D 24-pin x 1/Stereo Mini Jack (M3) x 2 (Shared with PC In)					
	PC In/Audio In (L/R)	Mini D-sub 15-pin x 1 (Female)/Stereo Mini Jack (M3) x 2 (Shared with DVI-D In)					
	Serial	D-sub 9-pin x 1 RS232C Compatible					
	IR In/Out	Stereo Mini Jack (M3) x 1/x 1					
	Audio Out	30 W (15 W + 15 W) 10% THD					
	LAN	RJ45 x 1, 10 BASE-T / 100 BASE-TX, Compatible with PLink™					
	DIGITAL LINK	RJ45 x 1, 100 BASE-TX, Compatible with long reach mode and PLink™					
	Slot	Intel® SDM specification Corresponding size SDM-S / SDM-L					
	USB	USB Connector (TYPE-A) x 2, DC 5 V/2 A, DC 5V/1A (USB 3.0 Supported)					
	Built-in speaker	20 W (10 W + 10 W)					
Power requirements	110-127 V AC, 50/60 Hz						
Power consumption	685 W	480 W	385 W	320 W	300 W	285 W	
Power off condition	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W	
Standby condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	
Dimensions (W × H × D) <i>The handle part included.</i>	86.4" x 49.2" x 3.6" (2194 x 1249 x 90 mm)	76.0" x 43.3" x 3.4" (1928 x 1099 x 86 mm)	66.15" x 37.75" x 2.87" (1681 x 959 x 73 mm)	57.4" x 32.9" x 3.1" (1458 x 836 x 77 mm)	48.9" x 28.1" x 2.9" (1240 x 714 x 74 mm)	43.5" x 25.1" x 2.9" (1104 x 637 x 74 mm)	
Weight	198.5 lbs (90.0 kg)	145.5 lbs (66.0 kg)	123.5 lbs (56.0 kg)	79.4 lbs (36.0 kg)	56.3 lbs (25.5 kg)	46.3 lbs (21.0 kg)	
Bezel width	0.63" (16.0 mm) (T/B/L/R)	0.6" (15.2 mm) (T/B/L/R)	0.58" (14.8 mm) (T/B/L/R)	0.46" (11.7 mm) (T), 0.60" (15.3 mm) (B), 0.48" (12.2 mm) (L/R)	0.48" (12.2 mm) (T), 0.62" (15.8 mm) (B), 0.50" (12.7 mm) (L/R)	0.56" (14.2 mm) (T/B), 0.51" (12.9 mm) (L/R)	
Wall-hanging pitch	31.5" x 19.7" (800 x 500 mm) VESA Compliant	23.6" x 15.8" (600 x 400 mm) VESA Compliant		15.8" x 15.8" (400 x 400 mm) VESA Compliant			
Operating time	24 h/day						
Operating environment	Temperature	32 °F to 104 °F (0 °C to 40 °C)/Altitude 0-4593 ft (1400 m), 32 °F to 95 °F (0 °C to 35 °C)/Altitude 4593 ft to 9186 ft (1400-2800 m)					
	Humidity	20-80% (Non condensation)					

Optional Accessories

- **Pedestal**
TY-ST75PE9 (for 75")
TY-ST55PE9 (for 65", 55")
TY-ST43PE9 (for 49")
- **Wall Hanging Bracket**
TY-WK98PV1 (for 98", 86", 75", 65")
Availability varies depending on the country.
- **Early Warning Software**¹
ET-SWA100/105 Series²
*1: Multi Monitoring & Control Software ver.2.1 or later required.
2: Part number suffix may differ depending on the license type.*
- **Auto Display Adjustment Upgrade Kit**
TY-VUK10
• Video Wall Manager Ver.1.11 or later required.
- **3G-SDI Terminal Board**
TY-SB01SS

Software (free)

- **Content Management Software (Ver.3.0 or later)**
** Windows® only.*
- **Multi Monitoring & Control Software (Ver.2.1)**
** Windows® only.*
- **Video Wall Manager**

Panasonic CONNECT

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability may vary on region and country. Intel® is registered trademark or trademark of Intel Corporation, registered in the U.S. and other countries and regions. This product may be subject to export control regulations. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other trademarks are the property of their respective trademark owners. ©Panasonic Connect Co., Ltd. 2022. All rights reserved.



For more information about Panasonic Professional Displays, please visit:

Display Global Website – panasonic.net/cns/prodisplays
YouTube – www.youtube.com/user/PanasonicProDisplay

Note: Following the shift of the Panasonic Group to a holding company system, the Connected Solutions Company of the Panasonic Corporation has changed to Panasonic Connect Co., Ltd. as of April 1, 2022.

All information included here is valid as of April 2022.

CT22-G01PF-SQ1 Printed in Japan.